



SpanSet secutex®

02

Lifting
Buffer pad
Lifting equipment



secutex-fork protection protects the load and the forks.

secutex forklift truck products offer maximum functionality and safety, which far exceeds DIN EN and German Federal Law requirements. Therefore, with secutex products you reduce your risks and increase your safety. Advantages which pay off in pounds and pence.

- Highly stable
- Workflow continuity assured
- Safe and efficient handling
- High safety margins

Properties of secutex fork protection

1. Slip-resistant

The secutex coating is made from polyurethane. Thanks to the high friction of the secutex coating, the load lies securely on the forks; the danger of the load slipping off is significantly reduced.

2. Noise-reducing

By using the secutex fork protection products, the contact area between the load and the forklift forks is equipped with the damping, flexible secutex material. Therefore, noise cannot be produced in the first place.

3. Wear-resistant


The secutex material is extremely robust and durable. The long service life results in considerable cost reductions.

4. Easily mountable

Avoid time-consuming mounting: secutex fork protection products are easy to attach. In the case of fork protection shoes, they are simply pushed on; fork extensions are secured using bolts and cotter pins.

02.3 FORK PROTECTION

secutex fork protection - fixed coating

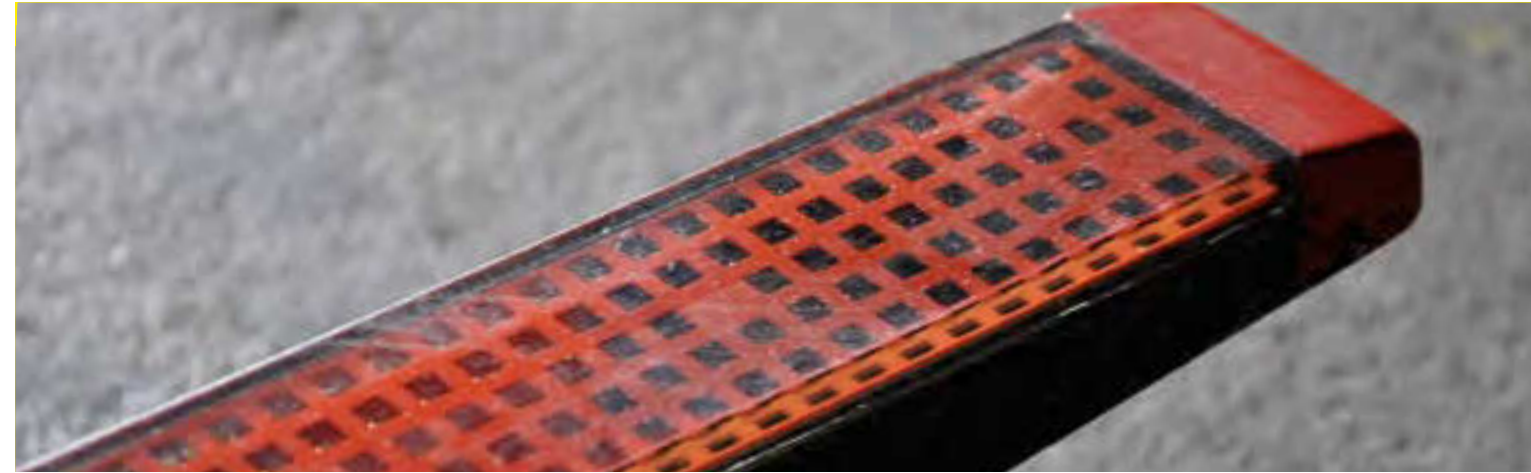

Fork protection for continuous heavy duty use

secutex fork fixed coating is selected when goods and wares need to be continuously transported carefully and safely.

Besides the coating of the fork prongs, depending on the application, the fork shanks are also equipped with secutex buffer pad. The secutex coating is particularly slip-resistant; therefore the load can hardly slide.

secutex buffer pad is especially wear-resistant, sound-absorbing and damping. Thus long-term use is assured.

SZ-F1

Forks with fixed coating

The configuration offers maximum protection for load and lifting gear and requires little space. secutex fixed coating is inseparably bonded to the fork prongs; the perforated plate prevents it from detaching from the fork prongs. A crossbar at the tip of the fork prong prevents the secutex coating from peeling off.

Type	Internal width [mm]	External width [mm]	Coating [mm]
SZ-F1	---	Zinkenbreite	10 - 12



SZ-F2

Shanks with fixed coating

This configuration offers maximum protection for goods that, for example, overhang the pallet edge. The secutex coating is inseparably bonded to the fork shanks. The perforated plate prevents separation from the fork shank.

Type	Internal width [mm]	External width [mm]	Coating [mm]
SZ-F2	---	Zinkenbreite	10 - 12



SZ-F3

Prongs and shanks with fixed coating

In this configuration the fork prongs and fork shanks are permanently coated with secutex buffer pad.

Type	Internal width [mm]	External width [mm]	Coating [mm]
SZ-F3	---	Zinkenbreite	10 - 12



Surface structures

For special applications that will be affected by water, oil or ice, we offer special surfaces. Talk to your expert adviser!

